

PLANT-SPEZIFICATION



General Data:


Customer:	GMI
Place:	México
AGV-System:	E-Criado, 1.070 x 730 mm
Installation:	03.07.2008
Invest:	10.000 EUR excl. mounting, start-up, training
Control AGV:	Optical guidance
Remote control:	none

Specific plant datas:

Length of driving course:	ca. 100 m
Time for installation the agv:	ca. 2 hours
Goods:	Boxes, cartons, small pieces
Transportation task:	testing
Load- and unloading:	manual
Construction:	None above E-Criado
Ø velocity:	0,5 m/sec.
Stops:	a) through break in tape b) through manual stop (stop-button)
Options:	none
Goals:	Experience in agv-system
Use:	casually
Time for agv use:	> 16 hours one battery charge
Specialities:	- pedestrian and fork-lift-traffic - transportation on demand or by period
Save of working time:	

DENKHAUS®

Scheme of driving course:

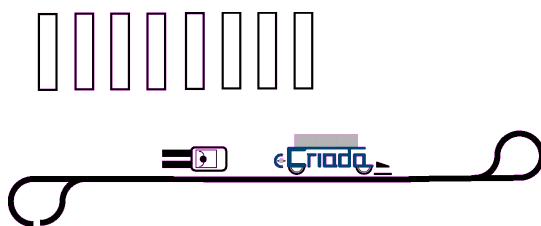

Bezeichnung	Maßstab
Kunde: GMI	Projektnummer/Auftr.-Nr.
	Datum: 03.07.08

Picture:



Customer opinion:

Satisfied with capabilities and ease to use technics